



# PRESSURE TRANSMITTER

## OEM Pressure Transmitter, NEMA 4X (IP66)

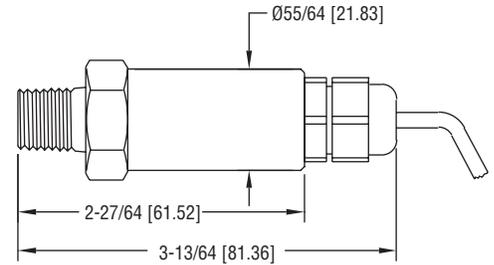

General Purpose Housing



Scan here to watch product video

The **SERIES 628CR** Pressure Transmitter, contains a low cost ceramic sensor enclosed in a compact, rugged, NEMA 4X (IP65) stainless steel body. Ideal for the budget conscious OEMs that require high levels of performance, reliability and stability at an unbeatable price. The 628CR enclosure is small and lightweight for optimum compatibility with OEM systems. The design allows for a variety of pressure ranges from 30 to 500 psi and optional electrical connections allowing you to select the right transmitter for your application.

### APPLICATIONS

- Pump monitoring
- Compressors
- Irrigation equipment
- HVAC
- Pneumatic systems

### SPECIFICATIONS

**Service:** Compatible gases and liquids.  
**Wetted Materials:** Ceramic, fluoroelastomer, 316L SS.  
**Accuracy:** ±1.0% FS (includes linearity, hysteresis and repeatability).  
**Stability:** ±0.25% FS/year.  
**Temperature Limits:** 0 to 185°F (-18 to 85°C).  
**Compensated Temperature Range:** 0 to 175°F (-18 to 79°C).  
**Pressure Limit:** Max pressure: 2x range; Burst pressure: 3x range.  
**Thermal Effect:** ±0.04% FS/°F.  
**Power Requirements:** 9 to 30 VDC.

**Output Signal:** 4 to 20 mA.  
**Response Time:** 3 ms typ.  
**Loop Resistance:** 0 to 1200 Ω max.  
**Current Consumption:** 40 mA max.  
**Electrical Connections:** Cable or DIN connector.  
**Process Connection:** 1/4" male NPT or 1/4" male BSPT.  
**Enclosure Rating:** NEMA 4X (IP66).  
**Mounting Orientation:** Mount in any position.  
**Weight:** 4.0 oz.  
**Agency Approvals:** CE.

MODEL CHART							
Example	628CR	-08	-GH	-P1	-E1	-S1	628CR-08-GH-P1-E1-S1
Series	628CR						Pressure transmitter
Range		08 09 10 12 13 14 71 90 91 75 92 93 81					0 to 30 psi 0 to 50 psi 0 to 100 psi 0 to 200 psi 0 to 300 psi 0 to 500 psi 0 to 2.5 bar 0 to 4 bar 0 to 6 bar 0 to 10 bar 0 to 16 bar 0 to 25 bar 0 to 40 bar
Housing			GH				General purpose housing
Process Connection				P1 P3			1/4" male NPT 1/4" male BSPT
Electrical Connection					E1 E3 E4		Cable gland with 3' of prewired cable Cable gland with 9' of prewired cable DIN EN 175801-803-C
Signal Output						S1	4 to 20 mA
Options						AT NIST	Aluminum tag NIST traceable certificate